

D8

PRODUCT CATELOGUE DESIGN



www.drix.co.in

Retro Toggle Switch
Traces of Time
Reviving Ancient Charm



Drix[®]
Home Intelligence



D8 VINTAGE EXTERIOR DESIGN

D8 PATENTED CHANGEABLE BACKLIGHT TECHNOLOGY



D8 METAL TOGGLE MECHANICAL RHYTHM





D8

RETRO GOLD
PLASTIC MATERIAL



D8

GREY
PLASTIC MATERIAL





D8

CHAMPAGNE PLASTIC MATERIAL

www.drix.co.in



Patented Backlight
Technology



Multiple color
Options



Anti-glare Humanized
Design



Graphic and Text
Customization



Powered by




Intelligence
Inside




ZigBee

VINTAGE
EXTERIOR DESIGN

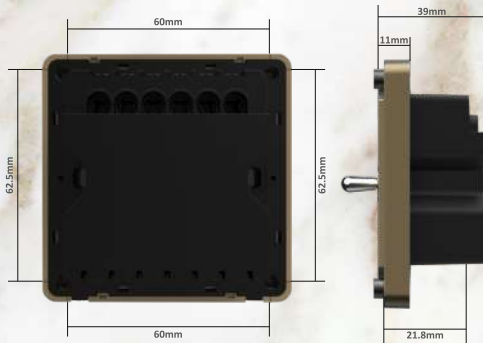

D8 BACK
COVER

D8 THERMOSTAT
BACK COVER

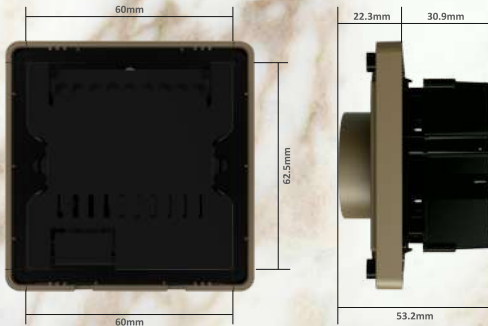

D8 SERIES – SWITCH

Button



1 Gang



2 Gang



1 Gang 2 Key



1 Gang 4 Key

Exterior Color



Retro Gold



Grey



Champagne

Powered by



General Information

Wiring Method:	Tuya Zigbee 3.0	Terminal Port:	×
Line:	●	Third-Party RCU:	×
Types of Switches:	●	Installation Method:	86mm Wall Box
Series:	D8	Relay:	●
Input Voltage:	220VAC	Changeable Backlight Function:	●
Resistive Load:	●	Touch Lifespan:	●
Capacitive/ Inductive Load:	●	Outer Frame Bracket:	/
Neutral Line/Live Line:	●	Product Features:	Patented Backlight Technology Multiple Color Options Anti-glare Humanized Design Graphic and Text Customization

Materials

Surface Materials:	●
Surface Treatment:	●

Dimensions

Product Dimensions:	●
Embedded Depth:	≥15mm
Cojoined:	●

D8 SERIES – 3 PIN UNIVERSAL SOCKET



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	×
Input Voltage:	AC220V	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box Precautions
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	×	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	×		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – 3 PIN UNIVERSAL SOCKET WITH SWITCH



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	×
Input Voltage:	AC220V	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	×	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	×		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information


Wiring Method:	220V High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	×
Input Voltage:	AC220V	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	16A	Touch Lifespan:	100,000 times
USB Input Voltage:	×	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	×		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	×
Input Voltage:	AC220V	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	×	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	×		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

**D8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET
WITH DUAL USB (NO BUTTON & NEON)**



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

**D8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)
(NO BUTTON & NEON) (FAST CHARGE)**



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A) (NO BUTTON & NEON) (NORMAL CHARGE)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Spray Surface Process Multiple Color Options
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Multiple Color Options Meets Users' Power Supply Needs
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – DUAL USB(C+A) SOCKET (FAST CHARGE)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current:	3A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	100-240V~,50/60Hz 0.3A	Product Features:	Multiple Color Options Meets Users' Power Supply Needs
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – TV SOCKET (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	TV Cable	Operating Temperature:	-20°C-+40°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	D8	Installation Method:	86mm Wall Box
Signal Attenuation Degree:	≤1dB Single TV Socket ≤ 1dB, ≤8dB One-Branched TV Socket ≤ 8dB, ≤10dB Two-Branched TV Socket ≤ 10dB.	Product Features:	Multiple Color Options Meets Users' Power Supply Needs
Insertion and unplugging life:	5000 times		


Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – DATA SOCKET (CAT 5) (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	CAT 5 Ethernet Cable	Operating Temperature:	-20°C-+40°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	D8	Installation Method:	86mm Wall Box
Number of Cores:	8 Cores	Product Features	Multiple Color Options Meets Users' Power Supply Needs
Connector:	QuickPort Embedded Module		
Transmission Speed:	250-1000MHZ		


Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – DATA SOCKET (CAT 6) (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	CAT 6 Ethernet Cable	Operating Temperature:	-20°C-+40°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	D8	Installation Method:	86mm Wall Box
Number of Cores:	8 Cores	Product Features	Multiple Color Options Meets Users' Power Supply Needs
Connector:	QuickPort Embedded Module		
Transmission Speed:	250-1000MHZ		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – TEL SOCKET (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	Telephone Cable
Types of Switches:	Information Socket
Series:	D8
Insertion and unplugging life:	5000 times
Operating Temperature	-20°C-+40°C
Operating Humidity:	≥95%

Installation Method	86mm Wall Box
Product Features	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	CAT 5 Ethernet Cable	USB Output Voltage	5±0.2VDC
Types of Switches:	Information Socket	USB Output Current:	2.1A
Series:	D8	Neutral Line / Live Line:	●
Number of Cores:	8 Cores	Installation Method:	86mm Wall Box
Connector:	QuickPort Embedded Module	Product Features	Multiple Color Options Meets Users' Power Supply Needs
Insertion and unplugging life:	100-200MHZ		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – LED MECHANIC FOOTLIGHT (SENSOR VERSION)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Operating Temperature & Humidity	-20°C~+40°C , ≤95%
Types of Switches:	Function Modular	Light Control Range	2Lux-10Lux
Series:	D8	Delay Time:	30±10 seconds
Input Voltage:	AC220V	Sensing Range:	2-4 meters (front) 1-2 meters (70 degrees on both left and right sides)
Rated Voltage:	220VAC±10%	Neutral Line / Live Line:	●
Power Frequency:	50/60Hz	Installation Method:	86mm Wall Box
Product Power:	0.65W	Product Features	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:7mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



General Information

Wiring Method:	220V High Voltage	Operating Temperature & Humidity	-20°C~+40°C , ≤95%
Types of Switches:	Function Modular	Light Control Range	×
Series:	D8	Delay Time:	×
Input Voltage:	AC220V	Sensing Range:	×
Rated Voltage:	220VAC±10%	Neutral Line / Live Line:	●
Power Frequency	50/60Hz	Installation Method:	86mm Wall Box
Product Power:	0.65W	Product Features	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Storage Temperature and Humidity:	-25℃~+70℃, ≤95%
Types of Switches:	Function Modular	Maximum Resistive Load for a Single Circuit:	2Lux-10Lux
Series:	D8	Neutral Line / Live Line:	●
Input Voltage:	AC220V	Standby Power:	1W
Rated Voltage:	220VAC	Installation Method:	86mm Wall Box
Power-off Delay Time	15s		
Operating Temperature & Humidity	-10℃~+45℃,≤95%		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – (DT) SHAVER SOCKET (BUILT-IN 10W TRANSFORMER) (MEDIUM-LARGE PANEL)

Drix[®]
Home Intelligence



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	USB Output Current	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D8	Relay:	×
Input Voltage:	AC220V	Changeable Backlight Function:	×
Rated Voltage:	110V-250V	Installation Method:	86mm Wall Box
Maximum Power:	2000W	Touch Lifespan:	100,000 times
USB Input Voltage:	×	Product Features	Multiple Color Options Meets Users' Power Supply Needs
USB Output Voltage:	×		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Neutral Line / Live Line:	●
Types of Switches:	Function Modular	Installation Method:	86mm Wall Box
Series:	D8	Product Features	Multiple Color Options Meets Users' Power Supply Needs
Input Voltage:	AC220V		
Rated Voltage:	110V-250V		
Maximum Power:	2000W		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Rated Operating Voltage	100-220-242V
Types of Switches:	Dimmer Switch	Input Frequency:	50/60Hz
Series:	D8	Maximum Load:	100W
Input Voltage:	AC220V	Standby Power:	1W
Operating Temperature and Humidity:	-10°C~+45°C , ≤95%RH(Non-condensing)	Neutral Line / Live Line:	●
Storage Temperature and Humidity:	-25°C~+70°C , ≤95%RH (Non-condensing)	Installation Method:	86mm Wall Box
Maximum Supply Voltage:	90V-264VAC,50/60Hz	Product Features	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – EMERGENCY CALL BUTTON (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Installation Method:	86mm Wall Box
Types of Switches:	Function Modular	Product Features	Multiple Color Options Meets Users' Power Supply Needs
Series:	D8		
Operating Temperature	-20°C~+40°C		
Operating Humidity:	≥95%		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – 600W DIMMER(MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Rated Operating Voltage:	100-220-242V
Types of Switches:	Dimmer Switch	Input Frequency Variation Range:	47-50/60-63Hz
Series:	D8	Maximum Output Power Load:	LED:100W Incandescent Lamp:300W
Operating Temperature and Humidity:	-10°C~+45°C,≤95%RH(Non-condensing)	Standby Power:	1W
Storage Temperature and Humidity:	-25°C~+70°C,≤95%RH (Non-condensing)	Neutral Line / Live Line:	●
Maximum Supply Voltage	90V-264VAC,50/60Hz	Installation Method:	86mm Wall Box
Rated Operating Voltage:	100-220-242V	Product Features:	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

D8 SERIES – 300W SPEED CONTROLLER (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage	Input Frequency Variation Range:	47-50/60-63Hz
Types of Switches:	Speed Switch	Maximum Output Power Load:	<300W
Series:	D8	Standby Power:	1W
Operating Temperature and Humidity:	-10°C~+45°C, ≤95%RH(Non-condensing)	Neutral Line / Live Line:	●
Storage Temperature and Humidity:	-25°C~+70°C, ≤95%RH (Non-condensing)	Installation Method:	86mm Wall Box
Maximum Supply Voltage	90V-264VAC, 50/60Hz	Product Features:	Multiple Color Options Meets Users' Power Supply Needs
Rated Operating Voltage:	250-1000MHZ		

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D8 SERIES – 300W SPEED CONTROLLER (MEDIUM-LARGE PANEL)



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Information Socket
Series:	D8
Input Voltage:	AC220V
Rated Current:	10A
Maximum Power:	2000W

Neutral Line / Live Line:	
Installation Method:	86mm Wall Box
Product Features:	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Plastic
Material



Retro Gold



Grey



Champagne

General Information

Air Conditioner Type:	Fan Coil		Air Conditioning Output Rated Power:	200W
Standard:	Two-Pipe	Four-Pipe	Set Temperature Range:	16 ~ 30°C, Temperature Control Accuracy: 1°C
Wiring Method	220V High Voltage 220V/485 High Voltage 485		Temperature Correction Range:	-6°C ~ 6°C, Resolution 1°C
Types of Switches:	G1 Thermostat		Temperature Sensor:	NTC Sensor
High Voltage:	☒		Adjustment Methods:	Push Button
Fan Speed:	3 Gears		Neutral Line/Live Line:	☒
Rated Input Voltage	AC200V~		Function Expansion:	☒
Rated Input Frequency:	50Hz		Installation Method:	86mm Wall Box

Materials

Surface Materials:	Plastic Material
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

SMART ~~SWEET~~ HOME

Kerala Distributor



electrosolutions
TRADING LLP

Keep In Touch :

+91 8129 325 325

Customer care

+91 7594 018 000

Head Office

Perinthalmanna

Branches

Manjeri | Edappal | Kondotty



www.electrosolutions.co.in

www.drix.co.in