


DK8

PRODUCT CATELOGUE DESIGN




www.drix.co.in

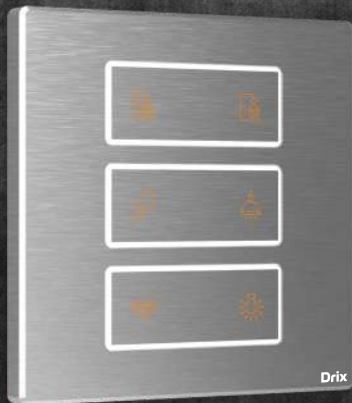

Aurora LED Circle
Metal Tact Switch
A Fashionable Masterpiece



Drix[®]
Home Intelligence

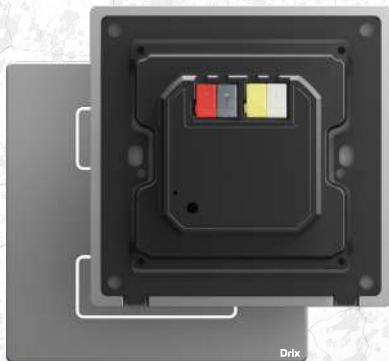


DK8 IMPORTED KNX CHIPS
BORN FOR KNX

DK8 METALLIC MATERIAL
WITH EXCEPTIONAL TEXTURE



DK8 CONFIGURED EXCLUSIVE THERMOSTAT

ENJOY SMART LIVING WITH EASE

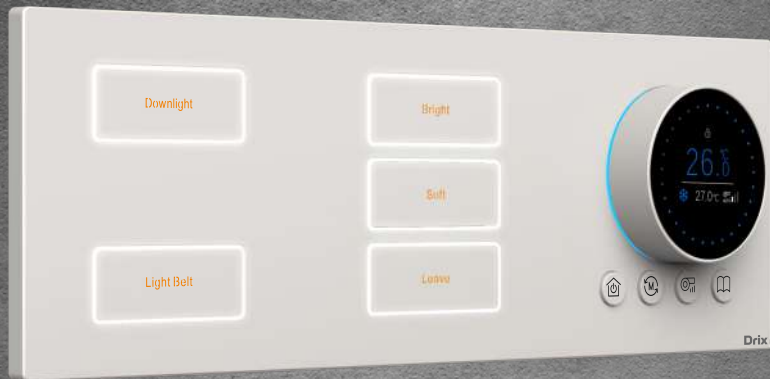

DK8 VIBRANT COLORS TAILORED TO YOUR DESIRES

www.drix.co.in



■ Spray White ■ Spray Grey ■ Frosted Silver ■ Spray Black



DK8 SPRAY WHITE METAL
MATERIAL

DK8 FROSTED SILVER METAL
MATERIAL



DK8 SPRAY GREY METAL MATERIAL



DK8 SPRAY BLACK METAL MATERIAL

DK8 SERIES



Multiple Color Options



Backlight Function



Conjoined Structure




Tact Switch



Multiple Material
Options




Customized Button
Graphics and Text

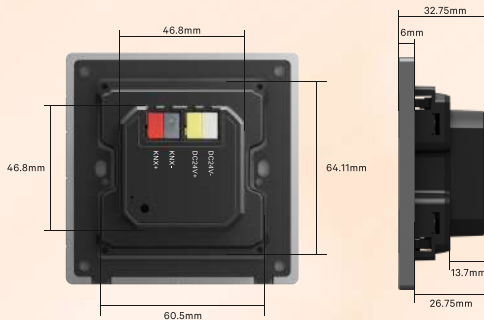

DK8 BACK
COVER

DK8 THERMOSTAT
BACK COVER

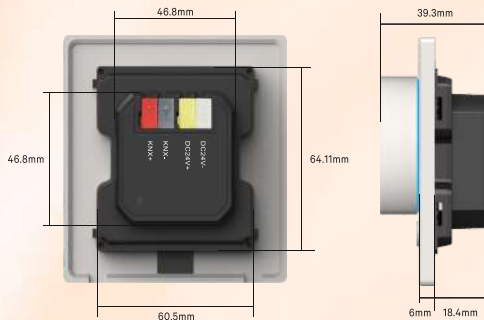

DK8 SERIES – KNX SWITCH

Button



1 Gang



2 Gang



3 Gang



4 Key 2 gang



6 Key 3 gang

Powered by



Exterior Color



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	KNX	Installation Method:	86mm Wall Box
Types of Switches:	Metal Tact Switch	Changeable Backlight Function:	●
Series:	DK8	Touch Lifespan:	100,000 times
Input Voltage:	24V DC	Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization
Terminal Port:	KNX		

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥15mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – KNOB THERMOSTAT



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Air Conditioner Type:	Fan Coil
Wiring Method:	KNX
Series:	Dk8 Knob Thermostat
Low Voltage:	☒
Fan Speed:	3 Gears
Rated Input Voltage:	24V
Standby Power:	1.2W
Set Temperature Range:	16 ~ 30°C Temperature Control Accuracy : 1°C

Temperature Correction Range:	-6°C ~ 6°C · Resolution 1°C
Temperature Sensor:	NTC Sensor
Adjustment Methods:	Twist Knob
Function Expansion:	Two-in-One: Floor Heating + Air Conditioning / Fresh Air; Three-in-One: Floor Heating + Air Conditioning + Fresh Air
Installation Method:	86mm Wall Box
Product Features:	CNC Edge Multiple Color Options

Materials

Surface Materials:	Aluminum Frame + Acrylic Display
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum
Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	16A
USB Input Voltage:	×
USB Output Voltage:	×


USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	×
USB Output Voltage:	×


USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	×
USB Output Voltage:	×


USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	×
USB Output Voltage:	×


USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES - THAILAND SOCKET WITH DUAL USB (C+A)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	16A
Rated Voltage:	250V
USB Input Voltage:	100-240V~
USB Output Voltage:	5V --- 3A 9V --- 2.2A 12V --- 1.67A

Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	×
Input Voltage:	AC220V	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Output Voltage:	×	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	10A
USB Output Voltage:	80-260VAC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A) (NO BUTTON & NEON) (FAST CHARGE)

Drix[®]
Home Intelligence



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Current:	10A
Rated Voltage:	250V
USB Input Voltage:	100-240V~
USB Output Voltage:	5V --- 3A 9V --- 2.2A 12V --- 1.67A

Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)(NO BUTTON & NEON)(NORMAL CHARGE)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Voltage:	250V
Rated Current:	10A
USB Input Voltage:	100-240V~
USB Output Voltage:	5±0.2VDC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options


Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET WITH SWITCH



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	80-260VAC
USB Output Voltage:	5±0.2VDC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB(C+A) (NO BUTTON & NEON) (FAST CHARGE)

Drix[®]
Home Intelligence



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~
USB Output Voltage:	5V ~ 3A 9V ~ 2.2A 12V ~ 1.67A

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)(NO BUTTON & NEON)(NORMAL CHARGE)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~
USB Output Voltage:	5±0.2VDC
USB Output Current:	2.1A

Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	CNC EdgeMultiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES – TV SOCKET(MEDIUM-LARGE PANEL)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	TV Cable	Operating Temperature:	- 2 0°C- + 4 0°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	DK8	Installation Method:	86mm Wall Box
Signal Attenuation Degree:	≤1dB Single TV Socket ≤ 1dB, ≤8dB One-Branched TV Socket ≤ 8dB, ≤10dB Two-Branched TV Socket ≤ 10dB.	Touch Lifespan:	100,000 times
Insertion and unplugging life:	5000 times	Product Features:	CNC EdgeMultiple Color Options Meets Users' Power Supply Needs


Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – DATA SOCKET (CAT 5) (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	CAT 5 Ethernet Cable
Types of Switches:	Information Socket
Series:	DK8
Number of Cores:	8 Cores
Connector:	QuickPort Embedded Module
Transmission Speed:	100-200MHZ

Operating Temperature:	- 2 0°C- + 4 0°C
Operating Humidity:	≥95%
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options


Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – DATA SOCKET (CAT 6) (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	CAT 6 Ethernet Cable
Types of Switches:	Information Socket
Series:	DK8
Number of Cores:	8 Cores
Connector:	QuickPort Embedded Module
Transmission Speed:	100-200MHZ

Operating Temperature:	- 2 0°C- + 4 0°C
Operating Humidity:	≥95%
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	Telephone Cable
Types of Switches:	Information Socket
Series:	DK8
Insertion and unplugging life:	5000 times
Operating Temperature:	- 2 0°C - + 4 0°C

Operating Humidity:	≥95%
Installation Method:	86mm Wall Box
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – 600W DIMMER (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Dimmer Switch
Series:	DK8
Operating Temperature & Humidity:	-10°C~+45°C · ≤95%RH (Non-condensing)
Storage Temperature & Humidity:	-25°C~+70°C · ≤95%RH (Non-condensing)
Maximum Supply Voltage:	90V-264VAC, 50/60Hz
Rated Operating Voltage:	100-220-242V

Input Frequency Variation Range:	47-50/60-63Hz
Maximum Output Power Load:	LED:100W Incandescent Lamp:300W
Standby Power:	1W
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – 300W SPEED CONTROLLER (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Speed Switch
Series:	DK8
Operating Temperature & Humidity:	-10°C~+45°C 75%~95%RH(Non-condensing)
Storage Temperature & Humidity:	-25°C~+70°C · ≤95%RH (Non-condensing)
Maximum Supply Voltage:	90V-264VAC,50/60Hz
Rated Operating Voltage:	250-1000MHZ

Input Frequency Variation Range:	47-50/60-63Hz
Maximum Output Power Load:	<300W
Standby Power:	1W
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – LED MECHANIC FOOTLIGHT (SENSOR VERSION)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Function Modular
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	220VAC±10%
Power Frequency:	50/60Hz
Product Power:	0.65W

Operating Temperature & Humidity:	-20°C~+40°C, ≤95%
Light Control Range:	2Lux-10Lux
Delay Time:	30±10 seconds
Sensing Range:	2-4 meters (front) 1-2 meters (70 degrees on both left and right sides)
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Function Modular
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	220VAC±10%
Power Frequency:	50/60Hz
Product Power:	0.65W

Operating Temperature & Humidity:	-20°C~+40°C, ≤95%
Light Control Range:	×
Delay Time:	×
Sensing Range:	×
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Function Modular
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	220VAC
Power-off Delay Time:	15s
Product Power:	0.65W

Operating Temperature & Humidity:	-10°C~+45°C, ≤95%
Storage Temperature & Humidity:	-25°C~+70°C, ≤95%
Maximum Resistive Load for a Single Circuit	2Lux-10Lux
Neutral Line / Live Line:	●
Standby Power:	1W
Installation Method:	86mm Wall Box

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Dimmer Switch
Series:	DK8
Input Voltage:	AC220V
Operating Temperature & Humidity:	-10°C~+45°C · ≤95%RH(Non-condensing)
Storage Temperature & Humidity:	-25°C~+70°C · ≤95%RH (Non-condensing)
Maximum Supply Voltage:	90V-264VAC, 50/60Hz


Rated Operating Voltage:	100-220-242V
Input Frequency:	50/60Hz
Maximum Load:	100W
Standby Power:	1W
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	80-260VAC
USB Output Voltage:	5±0.2VDC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – DUAL USB C+A SOCKET (FAST CHARGE)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~
USB Output Voltage:	5V --- 3A 9V --- 2.2A 12V --- 1.67A

Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options


Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

DK8 SERIES - (DT) SHAVER SOCKET (BUILT-IN 10W TRANSFORMER) (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum
Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	110V-250V
Maximum Power:	2000W
USB Input Voltage:	×
USB Output Voltage:	×


USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	110V-250V
Maximum Power:	2000W
USB Input Voltage:	×
USB Output Voltage:	×

USB Output Current:	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan	100,000 times
Product Features:	Metal Surface Craftsmanship Multiple Color Options


Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

DK8 SERIES – EMERGENCY CALL BUTTON (MEDIUM-LARGE PANEL)



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Function Modular
Series:	DK8
Operating Temperature:	- 2 0°C- + 4 0°C

Operating Humidity:	≥95%
Installation Method:	86mm Wall Box
Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Function Modular
Series:	DK8
Input Voltage:	AC220V

Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color

Aluminum Material



Spray White



Frosted Silver



Spray Grey



Brushed Black



Spray Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage
Types of Switches:	Function Modular
Series:	DK8
Input Voltage:	AC220V
Rated Voltage:	250V

Rated Current:	10A
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box
Product Features:	Multiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

SMART ~~SWEET~~ HOME

Kerala Distributor



electrosolutions
TRADING LLP

Keep In Touch :

+91 8129 325 325

Customer care

+91 7594 018 000

Head Office

Perinthalmanna

Branches

Manjeri | Edappal | Kondotty



www.electrosolutions.co.in

www.drix.co.in